

LED Post Top Light

SX4 SERIES · WATTAGE & CCT SELECTABLE



SX4 Series

FEATURES

- Field-selectable color temperature: 3000K / 4000K / 5000K
- 5-way wattage DIP switch: 50 / 80 / 100 / 120 / 150W
- High-brightness LED chips, up to 150 Lm/W
- 50,000-hour rated LED life
- Die-cast aluminum housing, black polyester powder coat with anti-salt treatment
- High-quality tempered glass optics
- Integrated photocell standard

APPLICATION

- Parking lots & perimeters
- Pathways & walkways
- Campuses & landscaping
- General area lighting
- Replaces traditional metal halide post tops

**5-YR
WARRANTY**

5-Year Limited Warranty



UL Listed



DLC Premium Listed



Complies with FCC Part 15



IP65 Rated

PARAMETERS

Input voltage: 100–277V AC

Wattage: 50 / 80 / 100 / 120 / 150W selectable

Color temp.: 3000K / 4000K / 5000K selectable

Efficacy: up to 150 Lm/W

Lumens: 7,350–22,500 lm


Housing: Die-cast aluminum, black powder coat

Lens: Tempered glass

Control: Integrated photocell

Rated life: 50,000 hours

DIMENSION

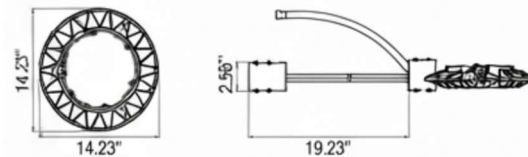

Ø 14.23" · H 2.56" (head) · L 19.23"

SPECIFICATIONS

Part Number	Wattage Selectable	Color Temp.	Lumens	LM/W	Voltage
NLS-SX4-150W-27-TCP-PC-BLK	50 / 80 / 100 / 120 / 150W	3K / 4K / 5K	7,350–22,500	150	100–277VAC

See reverse for ordering guide, installation & wiring.

N.SPIRE Lighting Solutions

www.nspire.lighting

Ph: 940-443-0274

Sales@nspire.lighting

Rev 10/2026 · Page 1 of 2

